



## POSMO™ II

Versatile and Space-Saving

The POSMO™ II is a compact touchscreen monitor with a small footprint. It saves valuable space on the counter. Built with an industrial-grade LED LCD panel, the POSMO™ II ensures exceptional durability. Its stable base stand, adjustable viewing angle and integrated MSR/IC reader make it versatile solution for Point-of-Sale or Point-of-Information environments. It can be placed above or on a counter and on a wall.

# POS Touch Monitor



## POSMO™ II

Versatile and Space-Saving

- 15" or 17" TFT LCD Display
- PCAP Touch or Optional Resistive Touch
- 15" with Bezel and Bezel-Free 17" Display
- Resolution up to 1280 x 1024, Brightness 300 cd/m<sup>2</sup>
- Countertop or Wall Mountable
- Interactive Digital Signage, Kiosk Solution, POS solution

### Superior Touch Display

With TFT LCD display and upto 1280 x 1024 resolution, the POSMO™II delivers more vivid and clear image. Its PCAP touch provides fast and accurate touch reponse. LED backlighting of the POSMO™II enables lower power consumption. With a choice of 15" or 17" monitor, the POSMO™II can meet individual business needs.

### Versatile Solution

Removable base stand and mounting options supported by VESA standard make installation more flexible. On a wall or a counter or on a shelf or a pod, the POSMO™II is best suited to meet a variety of POS and interactive solutions. (Point of Sale, Kiosk for Point of Information, and digital signage display)

## Options & Peripherals

### Touch Type

- 15" 5-Wired Resistive Touch

### Wall Mount Kit

- VESA-Compatible, 100 x 100(mm)  
With VESA mounting option, POSMO™II can be placed on the wall or above the counter.


### Card Reader

- Magnetic Stripe Reader : Comply with ISO 7811, Support 1 & 2 & 3 Track
- Smart Card Reader : EMV Level 1, 2

### Dallas

- Dallas i-button Reader


## Dimension

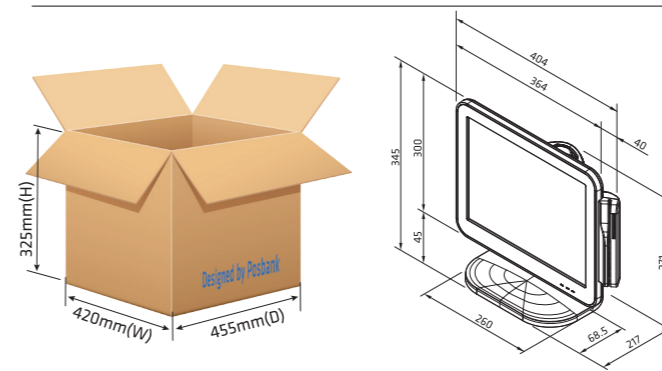


## Specifications

General Specifications	
<b>Display</b>	
Size	15" TFT LED Backlight   17" TFT LED Backlight
Resolution	15" 1024 x 768   17" 1280 x 1024 Resolution
Brightness	15" 300cd/m <sup>2</sup> (typ.)   17" Max. 300cd/m <sup>2</sup> (typ.)
Contrast Ratio	15" 500 : 1 (typ.)   17" 1000 : 1 (typ.)
View Angle (U/D/R/L)	15" 80°/80°/80°/80° (Typ.)   17" 85°/85°/80°/80° (Typ.)
<b>Touchscreen</b>	
Type	15" Projective Capacitive Touch 17" Projective Capacitive Touch
Controller Interface	USB Interface
<b>Interface</b>	
VGA	1
USB (A Type)	2
USB (B Type)	1
MSR	1 (RJ-45 for MSR, SCR, i-Button)
Audio	1 (Mic-in)
<b>Power</b>	
Power Supply	Adapter 12V, 3A
<b>Physical &amp; Environmental</b>	
Dimensions (W x H x D)	15" 364 x 345 x 217(mm) / 14.3 x 13.5 x 8.5(in) 17" 392 x 376 x 217(mm) / 15.4 x 14.8 x 8.5(in)
Net Weight	5600g, 12.3lbs
Packing Dimension (W x H x D)	420 x 325 x 455(mm) / 16.5 x 12.7 x 17.9(in)
Packing Weight	7400g, 16.3lbs
Certification	CE, FCC, KC
<b>Options and Peripherals</b>	
Type	15" 5-Wired Resistive Touch
Wall Mount Kit	VESA-Compatible, 100 x 100(mm)
Multi-Reader	MSR : Comply with ISO 7811, Support 1& 2 & 3 Track SCR : EMV Level 1, 2 Dallas : i-Button Reader

## What's in the Box ?



POSMO™ II



Installation Guide



Adapter



Power Cord