

# GWX 265


premium wax ribbon



## Product Description

This resin-enhanced wax grade offers superior density even at the highest speeds. Its unique composition renders your printouts the kind of durability that is usually only achievable with wax-resin ribbons. Due to its perfect heat conducting characteristics, little energy is required. The low heat level required and its print head protecting back coating will extend the life time of your printer's print head significantly. GWX 265 has an anti-static ink formula and it offers the best smear and scratch resistance a wax ribbon can. Like all our ribbons, GWX 265 complies with ISEGA for use in food processing environments. GWX 265 is truly in a class of its own!

## Performance Properties

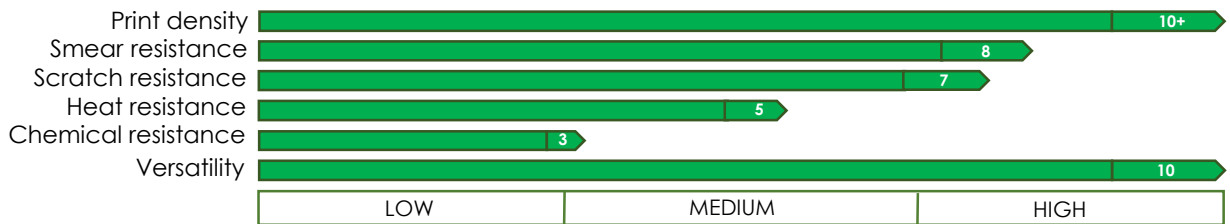

## Applications:



RFID



Manufacturing



Logistics



General  
Labelling



Global



Healthcare



Retail



Food



## Specifications

Ink Type	Resin enhanced wax
TPH Compatibility	Flathead
Ink melting point	65°C / 149°F
Printing speed	Up to 14ips
Base film material; thickness	PET; 4.5µ ± 0.1µ
Ink thickness	3.3µ ± 0.2µ
Total thickness	8.6µ ± 0.3µ
Colours	Black

## Storage Conditions

Temperature	5°C to 35°C (41F to 95F)
Humidity	10% to 85% relative humidity
Light	Avoid direct sunlight
Shelf life	> 24 months from production date

## Recommended Substrates:

Vellum, uncoated and coated paper, glossy paper, UV-varnished paper, flood-coated paper, polypropylene- and polyethylene coated paper, Kimdura®, Valeron®, hang tags